



The economical alternative for the acquisition of meteorological measuring data.

- Wind velocity
- Wind direction
- Precipitation
- Brightness
- Air temperature
- rel. Air humidity
- Air pressure
- GPS receiver
- Magnetic compass
- Global radiation*

CLIMA SENSOR US

The Clima Sensor US acquires the most important meteorological data with high precision in only one instrument.

The Clima Sensor US measures up to 10 meteorological parameters (s. figure), depending on model available. On this basis diverse derived measures are calculated in addition, such as:

- Wind chill temperature,
- Heat index temperature,
- Absolute humidity,
- Dew point temperature.

An integrated GPS sensor serves for the position determination and as real time source. With this information the air pressure on sea level can be corrected, and the current sun position can be calculated.

A version with integrated magnetic compass calculates the aspecular angle of the sensor to the magnetic north pole, and thus can be used for the automatic north correction of the wind direction, and the brightness.

Models available

The Clima Sensor US can be delivered in four basic variants. The measurements of the wind speed and wind direction are standard.

The instruments are equipped with a 19-pole plug, which leads through, among others, the signals of the analogue outputs, and serial interface.

An integrated boot loader offers the option to simply update also future innovation, via the serial interface in full-duplex mode (4-wire cable, RS422/455) as well as in half-duplex mode (2-wire cable, RS422/455)

8 analogue output channels (0 ... 10 V) are available, 5 channels of them can alternatively be configured universally.

Field of application

The compact design, the easy installation, and the flexible data output are the basis for the application in many fields of the meteorological data acquisition.

The data output of the measuring values as analogue standard signal and/or MODBUS-RTU via RS485 as well as the minimum maintenance expense thanks to omission of mechanically-movable elements, proves to be advantageous with the use in the following fields of application:

- Building control
- Traffic control systems
- Meteorology / climatology
- Renewable energy
- Environmental monitoring
- Industry

Output signals

Different means of communication offer highest-possible flexibility with the connection to super-ordinated controls and data acquisition systems.

Serial ASCII protocol

Connection RS422/485, communication through serial data transmission in ASCII format.


Serial MODBUS protocol


Connection RS485/422, communication through serial data transmission with MODBUS-RTU protocol.

Analogue outputs

8 analogue voltage outputs, 0 ... 10 V each, 5 of them are free configurable.

For more connectivity options please contact our sales staff, and request detailed information for your projects.

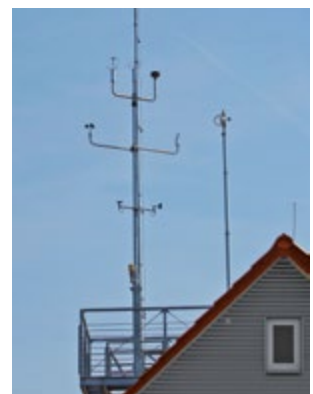

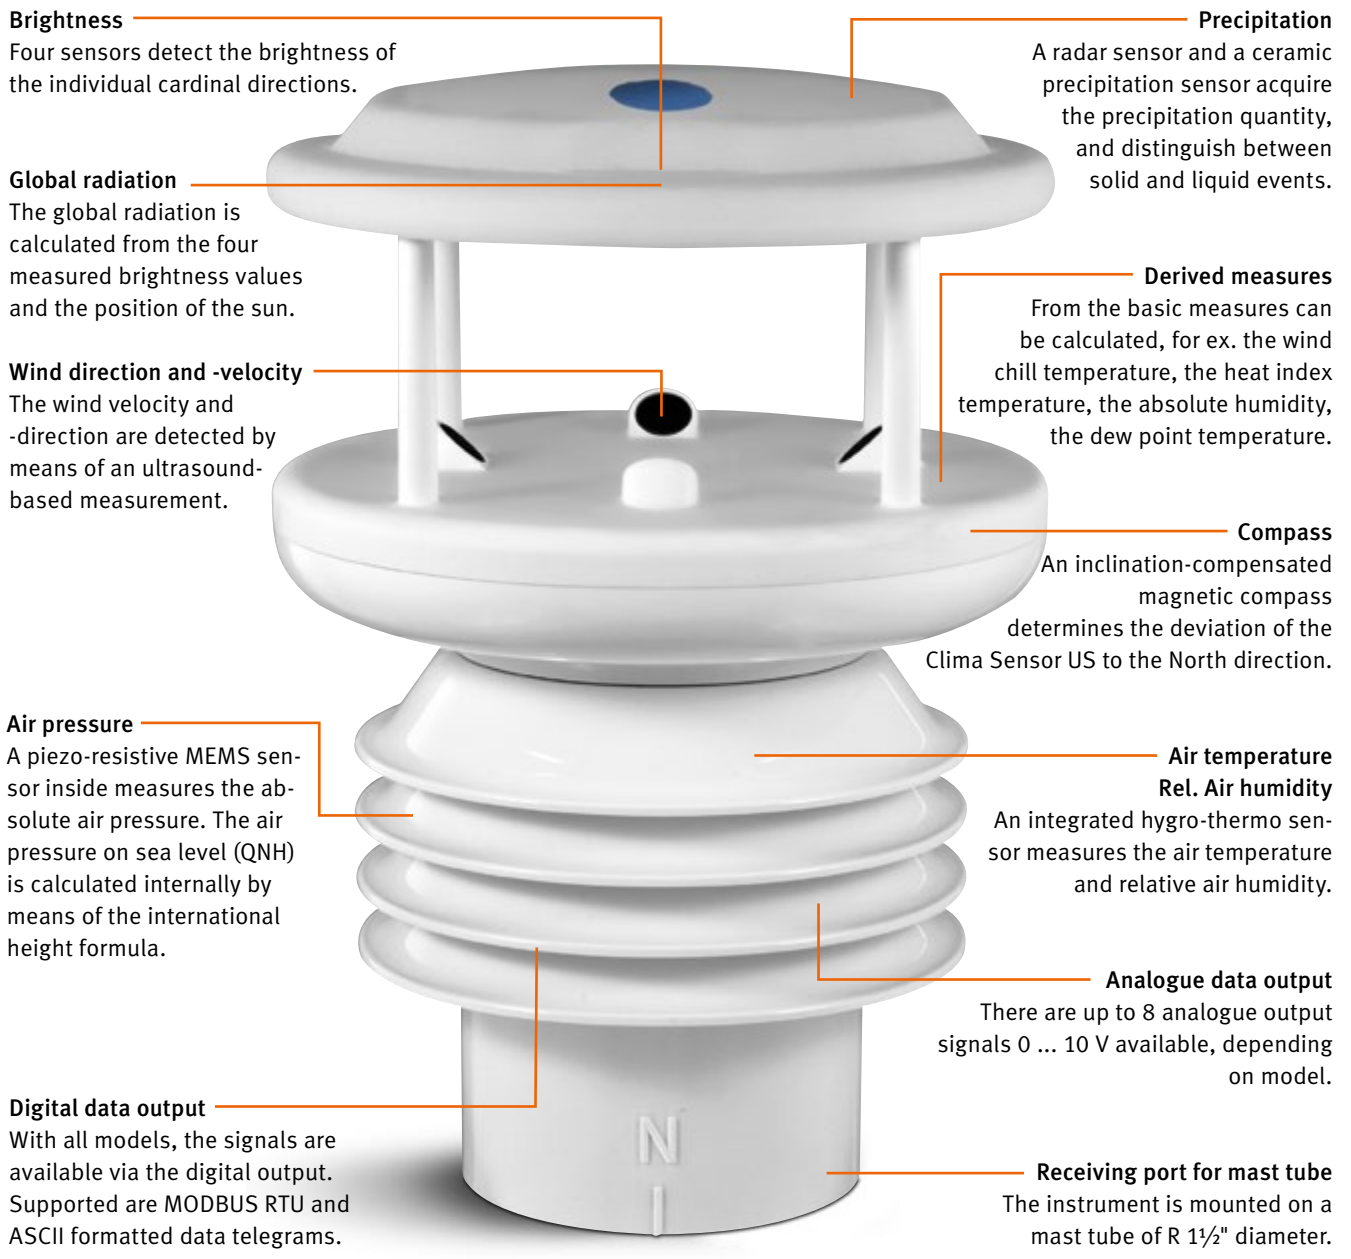

CLIMA SENSOR US

TECHNICAL DATA

Order-No.: 4.9200.00.00x

| | |
|-------------------------------------|---|
| Wind velocity | |
| Measuring range | 0 ... 60 m/s |
| Resolution | 0.1 m/s |
| Accuracy | ±0.3 m/s rms @ WV ≤ 5 m/s ±3% rms @ WV > 5 m/s ±3% rms f. Mv. @ WV > 5 ... 60 m/s |
| Wind direction | |
| Measuring range | 0 ... 360° |
| Resolution | 1° |
| Accuracy | ±2° @ WV > 2 m/s |
| Acoustic-virtual temperature | |
| Measuring range | -40 ... +80 °C |
| Resolution | 0.1 K |
| Accuracy | ±0.5 K |
| Air temperature | |
| Measuring range | -40 ... +80 °C |
| Resolution | 0.1 K |
| Accuracy | ±0.3 K @ 25 °C |
| rel. Air humidity | |
| Measuring range | 0 ... 100% rel. Humidity |
| Resolution | 0.1% r. H. |
| Accuracy | ±1.8% @ 10 ... 90% r. H. |
| Air pressure | |
| Measuring range | 500 ... 1200 hPa |
| Resolution | 0.1 hPa |
| Accuracy | ±0.2 hPa @ 0 ... 65 °C and 800 ... 1100 hPa |
| Brightness | |
| Measuring range | 0 ... 150 kLux |
| Resolution | 0.3% of meas. value |
| Accuracy | ±3% of meas. value |
| Global radiation* | |
| Measuring range | 0 ... 2000 W/m² |
| Accuracy | ±30 W in comparison to a CLASS B pyranometer |

| | |
|---|--|
| Precipitation intensity | |
| Measuring range | 0 ... 999 mm/h |
| Resolution | 0.001 mm/h |
| Type of precipitation | Rain, snow, sleet, ice crystals, hail |
| Data output digital | |
| Interface | RS485 / RS422 |
| Baud rate | 1200 ... 921600 baud |
| Output | instantaneous values, mean values |
| Output rate | 10 ... 0.1 Hz |
| Protocol | ASCII (Thies-format) MODBUS RTU |
| Data output analogue | |
| Output | 0 ... 10 V galvanically isolated from supply |
| Output | instantaneous value, mean values |
| Update | 10 msec |
| Resolution | 16 bit |
| General | |
| Bus operation | up to 99 instruments |
| Operating voltage | 6 ... 40 V DC or 10 ... 28 V AC, 50 Hz / 60 Hz |
| Heating | 24 V AC / DC, 25 VA |
| Electrical connection | 19 pole plug |
| Housing | plastic material, UV stabilized, shock-proof, weather-proof |
| Protection | IP67 |
| Dimension | Ø 150 x 220/175 mm |
| Mounting | Mast tube R 1½" (Ø 48.3 mm) |
| Weight | approx. 900 g |
| Temperature range | -40 ... +70 °C |
| Accessories | |
| 7.1415.00.200: Universal data converter RS485 / analogue | |
| 9.1700.98.001: PC visualization software MeteoOnline | |

* Calculated from the measured brightness values.

Models available: All models have RS485/422 interface, and analogue output

| Order-No. | Wind | Precipitation | Brightness | Temperature | Air humidity | Air pressure | GPS-Receiver |
|---------------|------|---------------|------------|-------------|--------------|--------------|--------------|
| 4.9200.20.00x | X | X | X | X | X | X | X |
| 4.9201.00.00x | X | | | X | X | X | |
| 4.9202.20.00x | X | X | X | | | | X |
| 4.9203.00.00x | X | | | | | | |

4.920x.x0.000 = Data protocol: ASCII (Thies-format)

4.920x.x0.001 = Data protocol: MODBUS RTU

Please contact us for your system requirements. We advise you gladly.



ADOLF THIES GMBH & CO KG
 Meteorology and Environmental Technology
 Box 3536 + 3541 · 37025 Göttingen · Germany
 Phone +49 551 79001-0 · Fax +49 551 79001-65
 info@thiesclima.com

www.thiesclima.com

